

Latexco Quality Department Document

Code: FR-CS-MAT
Doc.: Technical Data Sheet
Review date: 26/02/2018

Version: 4
TDS: Mattress type BP872
Page: 1 of 2

Mattress type BP872

1. General

Mattress produced by vulcanisation of a mixture of 100% natural latex in the standard Dunlop process.

2. Physical properties¹ - Density & Firmness

Height	Firm
Density	80
18 cm	40 / 180

2b. Physical properties - General Medium properties

Property	Nominal value	Norm	Remark
Hysteresis (%)	20	ISO 2439	Method B
Resilience (%)	55	ISO 8307	
Sag-factor (-)	4.5	ISO 2439	Method B
Tensile strength (kPa)	45	ISO 1798	
Elongation (%)	250	ISO 1798	
Compression (%)	3%	ISO 1856	50%, 70°C, 0rh, 22h
Dynamic fatigue (%)	0% 19%	ISO 3385	Height loss Hardness loss
Dynamic fatigue (%) durability test	0% 22%	EN 1957	Height loss Hardness loss
Fire retardant properties	NA NA	ISO 1021-1 ISO 1021-2	Cigarette test Open flame

¹For product comparison only. The test results are average values, to which tolerances are applicable, subject to change. Values of firmness in hPa, according own method before the "/" and in Newton according ISO2439B, at 40% compression after.

Latexco N.V.
Sint-Amandstraat 8B
8700 Tielt - Belgium

T: +32 51 40 14 31
F: +32 51 40 55 66
www.latexco.com



This document uses a unique code and replaces any older versions

Latexco Quality Department Document

Code: FR-CS-MAT

Doc.: Technical Data Sheet

Review date: 26/02/2018

Version: 4

TDS: Mattress type BP872

Page: 2 of 2

3. Quality certificates




4. Product tolerances

Dimensions		
Length (%)	Width (%)	Height (mm)
+1,5/-0,5	+1,5/-0,5	+10/-0

Physical properties				
Density (kg/m ³)	Firmness (hPa)	Compression (%)	Fatigue (%h)	Durability (%h)
+/-5	+/-4	< 8 %	< 5 %	< 25 %

5. Visual appearance²

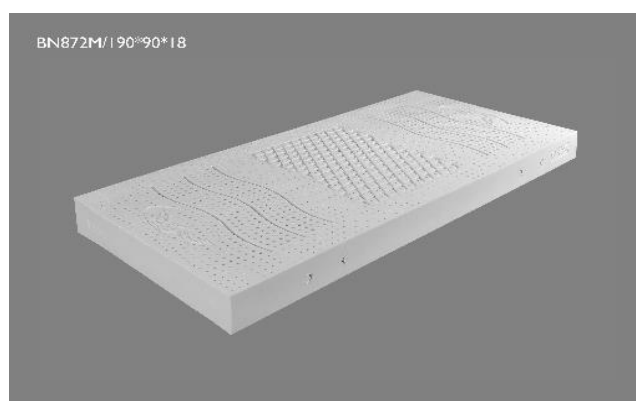

²Products conform to Latexco visual standard

Latexco N.V.
Sint-Amandstraat 8B
8700 Tielt - Belgium

T: +32 51 40 14 31
F: +32 51 40 55 66
www.latexco.com



This document uses a unique code and replaces any older versions